

Cost saving  
Time-saving  
Sustainable

Multisserie with  
grease separator and  
internal condenser

**The Multisserie is a revolution in visual cooking and merchandising. Designed to give extra prominence to your products, the Multisserie allows your customers a 270-degree view of the cooking theatre.**

The Multisserie is equipped with an internal condenser. The condenser transforms steam into drain water during the cooking cycle. Moreover, it loses steam at the end of the cycle. This provides maximum safety as no steam will escape from the Multisserie when your operator opens the door.

With the Fully Automatic Cleaning system, cleaning can be done overnight without operator intervention. The Multisserie with grease separator efficiently separates grease from water during the cook cycle. By using a grease separator, the total volume of waste will be decreased significantly. Moreover, the harvested fat can become a reusable energy source.



### Features Multisserie with grease separator and internal condenser

#### Top features

- Supplied on stand with grease separation system
- Impulse generator, show cooking with 270-degree view
- Fully automatic cleaning system with detergent and rinse aid dispenser
- Cook Correction to control food safety
- Internal condenser

#### Standard characteristics

- 12 Chicken racks or multi-purpose baskets
- Chicken racks for up to 48 chicken (5 lbs)
- 250 programs with up to 9 steps
- High speed convection for even cooking
- Boiler-less steam generator with different steam levels, programmable
- Attractive halogen lighting
- Curved, double glass doors for perfect insulation and safety
- Accessible from three sides, doors lockable at customer side
- Separates water (to drain) and fat
- Seamless stainless steel interior, stainless steel exterior

#### Accessories

- Chicken racks (included)
- Multi-purpose baskets
- Door locking handle on customer side
- Water filtration system

#### Optional


- Stainless steel cladding for underframe



Hygienic fat collection




Internal condenser



Stainless steel cladding (optional)



Fully automatic cleaning

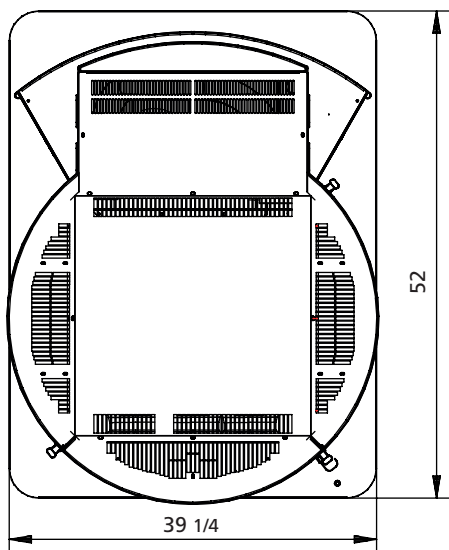

## Multiserie with grease separator and condenser

### Dimensions

Width	39 1/4"
Depth	52"
Height incl. condenser	87"

### Technical data

Net weight	1025 lbs
Gross weight	1312 lbs
Voltage	208/120 V
Phase	3 (5 wire)
Frequency	60 Hz
Power	21.4 kW
Breaker	80 A
Temperature range	122-482 F
Water drain	2"
Water connection Wash	G 3/4"
Water connection Steam&Rinse	G 3/4"
Water pressure	min. 40 psi at 4 GPM

### Additional Technical data

#### Water Heater

Water connection	G 3/4" via multiserie
Voltage	208 V
Frequency	60 Hz
Phase	1
Breaker	20 A

Specifications and technical data are subject to amendment without notice.

These are basic drawings. For more detailed technical information, please refer to the installation manual at [www.frijado.com](http://www.frijado.com).

