



SERVICE INSTRUCTION

Replacement Carel KUE cylinder 9124424



Turn off the water tap. Empty all the water by pressing the up and down button together for 2 seconds to manually drain the water. Press again for 2 seconds to stop the drain cycle.




Disconnect the mains supply.



Loosen the screws. Take out the back plate and wait for the humidifier and the cylinder to cool down




Be carefull not to damage the internal cables

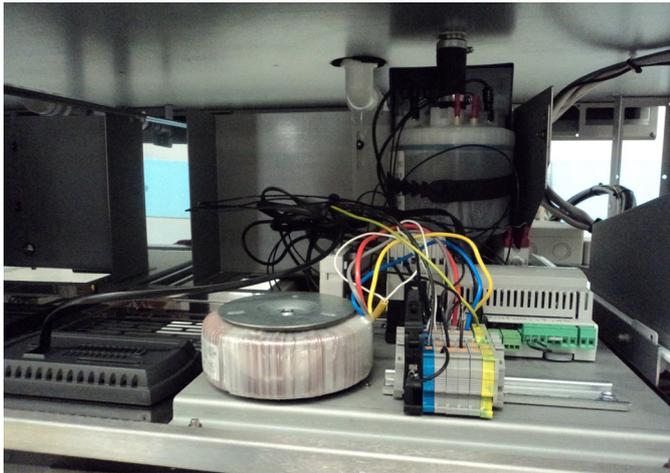

Disconnect all 4 cables from the cylinder



Release the locking device

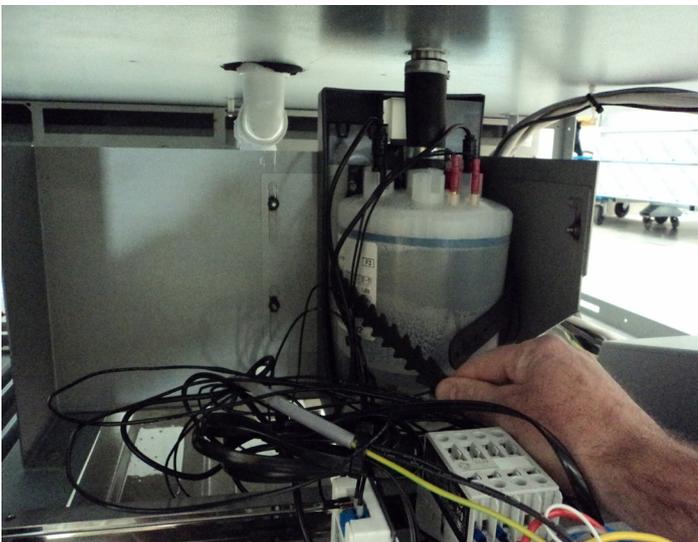

Loosen the hose clamp



Loosen the 3 nuts to be able to move the unit downwards



Release the cylinder and lift it to remove. Put the the cylinder in the same position back again.



Move the unit upwards and tighten the hose clamp. Tighten the unit with the 3 nuts. Connect all cables, tighten the strap and put the back plate back.



Reset the cylinder hour counter:

- Press the PRG button for 2 seconds
- Go to 77 using the UP or DOWN button
- Confirm with PRG and use the UP DOWN button to enter the 'da' parameter
- confirm with the prg button

Activate the wash new cylinder procedure by pressing PRG+DOWN for 5 seconds



- NOTICE -

This instruction is prepared for the use of trained Service Technicians and should not be used by those not properly qualified.

The information presented in this document is only valid for standard Custom Counter Configurations.

Reproduction or other use of this Instruction, without the express written consent of Fri-Jado, is prohibited.