


Doc. nr. 9128142	Rev. 1	Registration form. Instruction replacement fan grid TDR 5 AC + TDR 8 AC	
----------------------------	------------------	---	---

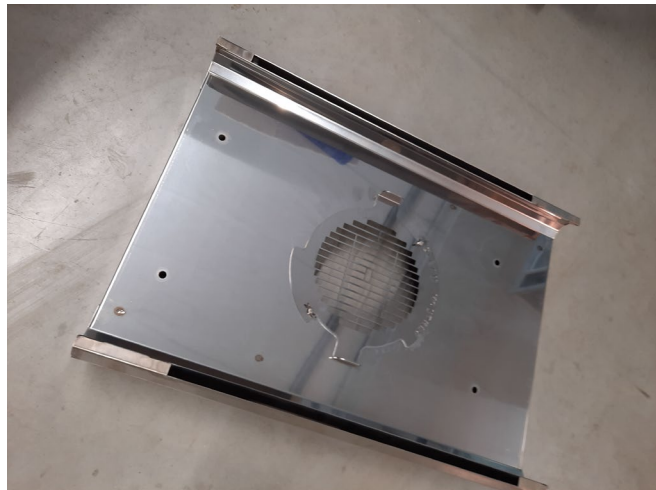

New fan grid with removable grid.

For TDR 8 AC use:

9310446 - Ass. Fan plate EU AC 8

For TDR 5 AC use:

9310526 - Ass. Fan plate AC 5

For spare removable grid use:

9314205 - Grid 1,5mm Fan plate


9261029 - Wing bolt M5



Step 1

Make sure the oven is switched off and at ambient temperature.

Remove the rotor disc assembly from the oven for easy access to the fan grid.

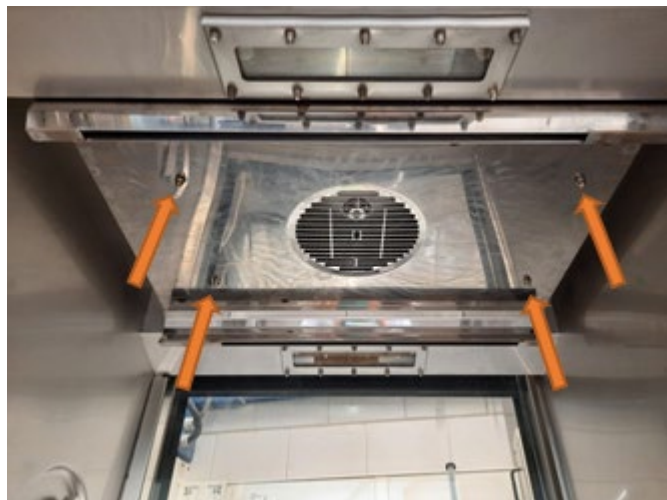


Step 2

Remove the 4 M6 nuts which hold the grid in position with a 10mm wrench.

Note:

Hold the fan grid in position with one hand in the center of the grid while removing the 4 nuts. Once all nuts are removed you can lower the grid and remove it from the oven.


Doc. nr. 9128142	Rev. 1	Registration form. Instruction replacement fan grid TDR 5 AC + TDR 8 AC	
----------------------------	------------------	---	---



Step 3


Install the new fan grid in the reverse way the old plate was removed.

After this you can place back the rotor disc assembly in the oven.

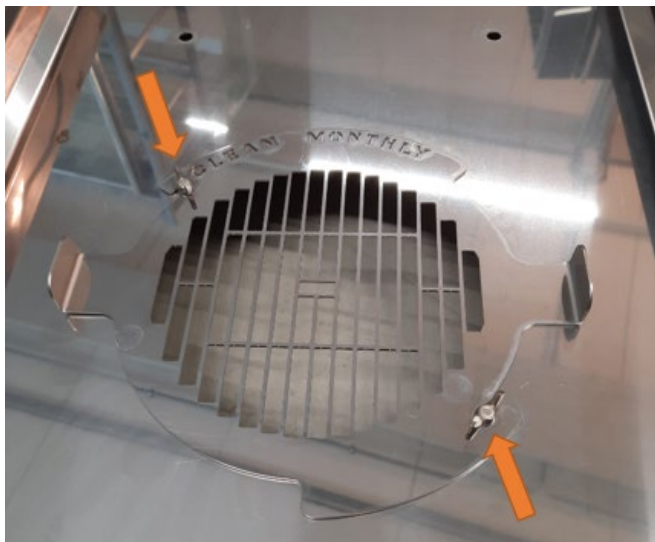

Note:

The removable fan grid is fixed with two wing bolt which can be fixed or loosen by hand / without tools.

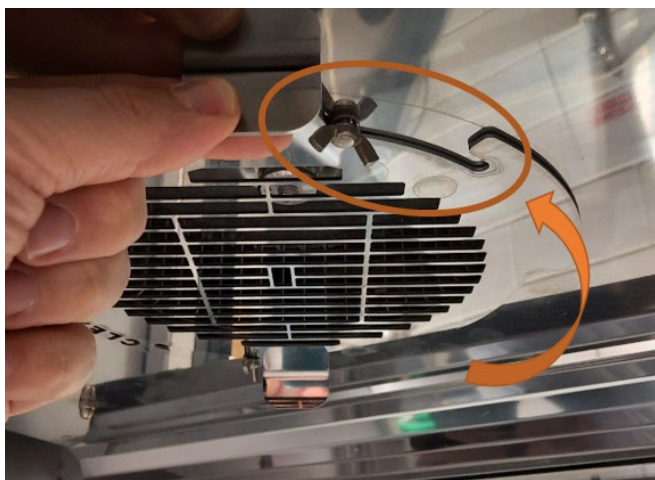

Cleaning:

When dirt is building up in the grid loosen the two wing nuts a couple of turns.

Move one side of the grid to the 'open' position by rotating the grid. Now you can lower that side from the grid and repeat this for the other side to remove the grid from the oven for cleaning.