
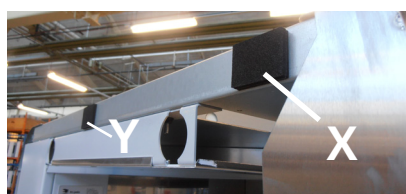


REPLACING SIDE GLASS MD ESSENTIAL.

It is recommended to have the service manual of the MD series (9123788 for the Euro version or 9123649 for the USA version) at hand.



1. Remove the product stopper, the bottom-plate and the price rail assembly on the bottom side according prior procedures. The attachment rings are visible.
2. Remove the top cover and insulation plates on the top side according prior procedures. The attachment rings are visible.
3. Remove the nuts that secure the attachment rings and remove the rings and nuts.
4. Remove all broken glass and silicon residue and clean the surface.
5. Glue 2 pieces of foam (part nr. 9222048) on top of eachother on the top side (X) and glue one piece of foam on the middle side on the top (Y).
6. Apply silicone sealant Dow Corning 732 (part.nr. 4302373). following the pattern as shown in the picture.
7. Put the new glass on its place by position the notches which are glued to the glass in the holes. To secure the glass with one or two clamps makes it easier.
8. Put the attachment rings over the threaded studs and secure the glass by tighten the nuts on the studs.
9. Replace all parts back on the Merchandiser.

Part numbers glass:

Side glass left, ass. 9220048S.

Side glass, right, ass. 9220049S.

Additional parts:

Foam 3x per glass 9222048.

Silicone sealant 4302373.

Note: Use a hammer and strong chisel in combination with a spatula to remove the glass. See next page.



